




Short Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives

330RA/340RA Series

2 Inch
(50 mm)




| Maximum Sanding Pad Size | Max. Rated Speed | Exhaust Direction | Lever Style | MODEL NUMBER |
|--|------------------|-------------------|----------------|---------------|
| 2 Inch (50 mm) 1/4-20 Spindle Output Thread | 12000 RPM | Rear | Standard Lever | 330RA6;12000 |
| | | | Safety Lever | 330RA6K;12000 |
| | 20000 RPM | | Standard Lever | 340RA6;20000 |
| | | | Safety Lever | 340RA6K;20000 |

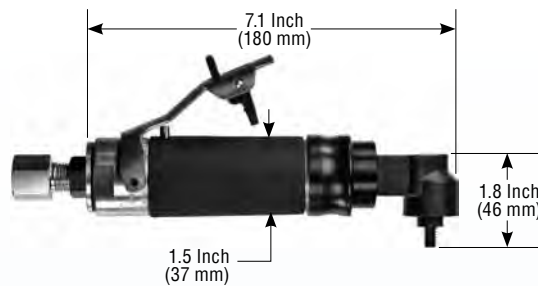

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

330RA/340RA Alternate Options

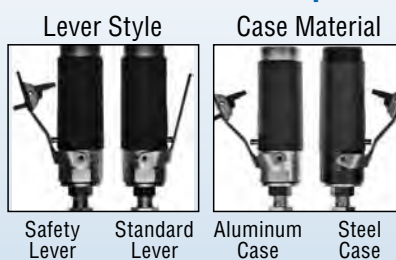


Surface Conditioning Abrasive Mounting



WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.



**ES GIBT NOCH MEHR ZU ENTDECKEN!
BESUCHEN SIE UNSERE WEBSEITE:
www.tairi-tools.at**

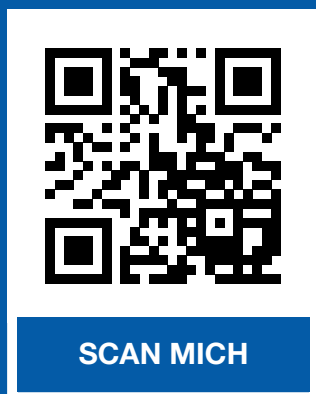

**Tairi-Tools Maschinen- und Handels KG
Druckluftwerkzeuge und Druckluftzubehör**

**Paschinggasse 8/4/B1, 1170 Wien, Austria
Tel: +43 (0) 664 851 8800, Fax: +43 (0) 1 957 0276
e-mail: info@tairi-tools.at
www.tairi-tools.at**